


## SAMSUNG SDS

# Samsung SMART Doorlock

### SAMSUNG SHS-6020/ H635 QUICK GUIDE



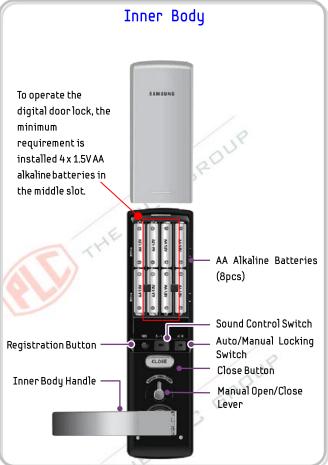

No.	Name	Description
1	9V Emergency Power Port	Power can be supplied from the emergency battery after the main batteries have been completely discharged (9V alkaline battery).
2	RF Card Reader	The RF card reader will operate properly when a key tag and a RF card are placed within 20mm and within 10mm of the card reader.  The recognition distance may differ depending on the card manufacturer.
3	Battery	Although actual battery life differs depending on the manufacturer, date of production and operation environment, 8x1.5VAA alkaline batteries can last for one year, based on an average of 10 uses per day. Liquid leaks from batteries can damage the product. Check/replace the batteries regularly (every 6 months).  Don't mix the batteries of the different brand, because it will affect the lock performance.
4	Mechanical Override Key Hole	A mechanical key hole is located at the bottom of the outer body. Insert the key into the key hole and rotate it to the right or left to lock or unlock the lock.
5	Sound Control Switch	This is used to control the volume of the sound that is generated on the lock.  [0] Button: All sounds except the alarm sound are deactivated.  [1] and [2] Buttons: All sounds are activated and the sounds get bigger as the step become higher.
6	Running LED	It displays the operation status of the door lock when it reads a card or it operates.



1-Year Installation Warranty



2-Year Product Warranty



Samsung RF Warranty Card - PLC Warranty Services:

- Service Enquiries
- Key Duplication
  - Cylinder Replacement Orders

DISCLAIMER: All information are subjected to change at anytime without prior notice by The PLC Group or its associated partners/suppliers. Should there be any variations in product functionality, outlook, technical specifications, documentation, service, warranty, promotions and/or pricing, the actual offering at the time of purchase shall be the confirmed version.

The catalog informationis for reference only. Forupdated details, please contact The PLC Group.

In case of dispute, The PLC Group reserves the right to final decision.

If there is any inconsistency of conflict between English and Chinese version, the English version shall prevail.

Samsung SMART Doorlock names and logos are registered trademarks and properties of SAMSUNG SDS CO. LTD., any use without prior written consent is prohibited. Copyright® 2015 All rights reserved.





## **SAMSUNG SDS**



#### SAMSUNG SHS-6020/ H635 簡易功用說明





No.	名稱	功用說明
1	9V 緊急電源接口	當電池用完時,接入應急用電池,即可接通電源。(使用 9V 鹼性電池)
2	感應卡讀頭	持卡接近讀卡感應區,迷你卡應保持在 20mm 以内,RF 卡應保持在 10mm 以内。 不同制造商生產的電子卡的感應距離可能有所不同。
3	電池	電池因制造廠家、制造日期、使用環境不同,使用壽命會稍有差異。8 顆 1.5V AA 型鹼性電池,按 1 天使用 10 次為例,大約可用 12 個月。 為避免電池液體洩漏時會損壞鎖體,請務必定期(約 6 個月間隔)進行確認或更換。 請勿混合不同品牌的電池,混合不同品牌的電池會影響數碼電子門鎖性能。
4	機械鎖匙位	門外側鎖體下面有緊急機械鎖匙孔。插入應急鎖匙左/右旋轉後,拉下門外則把手,即可開門。
5	音量控制鍵	調節門鎖聲音的開關。 [0]鍵 所有的聲音為静音。(警報音除外) [1]~[2] 鍵所有的聲音都開啟,設定的數字越大聲音越響亮。
6	工作 LED	識別電子卡或鎖門時顯示工作狀態。



1年安裝保養證



2年產品保養證



SAMSUNG 原廠感應保養卡 - PLC 保養服務包括:

- 服務查詢
- 配匙服務
- 鎖膽更換服務

DISCLAIMER: All information are subjected to change at anytime without prior notice by The PLC Group or its associated partners/suppliers. Should there be any variations in product functionality, outlook, technical specifications, documentation, service, warranty, promotions and/or pricing, the actual offering at thetime of purchase shall be the confirmed version.

The catalog information is for reference only. For updated details, please contact The PLC Group.

In case of dispute, The PLC Group reserves the right to final decision.

If there is any inconsistency of conflict between English and Chinese version, the English version shall prevail.

Samsung SMART Doorlock names and logos are registered trademarks and properties of SAMSUNG SDS CO. LTD., any use without prior written consent is prohibited. Copyright® 2015 All rights reserved.

