



Q² 2013




Wall lighting fixture for interiors, with indirect light emission.
Die-cast aluminium wall bracket in polyacrylic paint.
Extruded aluminium structure in matt white or titanium polyacrylic paint.

○ TECHNICAL DATA




| | |
|--------------------------|---------------------|
| Code | A09801.001.0106 |
| System power consumption | 17W |
| Efficacy | 88.82lm/W |
| Light source | LED |
| Colour temperature | 3000K Ra >80 |
| Light distribution | diffused |
| Power supply | 220-240V AC |
| Frequency | 50/60Hz |
| Electrical configuration | ON-OFF |
| Driver | integrated included |
| Nominal luminous flux | 1510lm |
| Lumen output | 1510lm |
| Efficiency | 100.000% |
| Weight | 0,9920Kg |
| Protection degree | IP20 |
| Colour tolerances | SDCM3 |
| Packing dimensions (cm) | 16 x 30 x 14 |

○ POLAR DIAGRAM

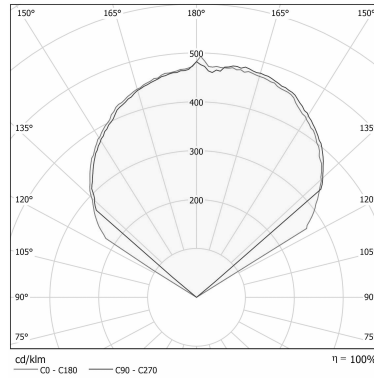

○ TECHNICAL DRAWING

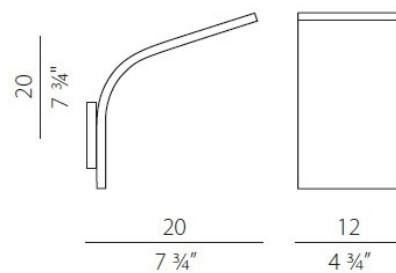

○ COLOUR

matt white





Q2 2013

○ ACCESSORIES

XM14/230

Dimmable device for 230V LED modules, 5÷100W.

